

TG230M20S01L

RF Coaxial Isolator

Typical Applications

- Wireless Telecommunication systems
- IF Applications

Main Features

VHF Band Coaxial Isolator
SMA Connectorized

Electrical Specifications

Parameter	Unit	Specification
Frequency Range	MHz	220 - 240
Isolation	dB	20 min
Insertion Loss	dB	< 0.6
VSWR		1.3 : 1 max
Average Power (FRD/REV)	W	2/2 max CW
In/Out Impedance	Ohm	50 typ.

Mechanical Specifications

Parameter	Unit	Specification
RF connectors		SMA - female
Finish		Nickle plated

Environment

Parameter	Unit	Specification
Operating Temperature	°C	-20°C to +70°C

Products and Product Information are Subject to Change Without Notice

TECHNIWAVE • Chemin de Montfort 78770 THOIRY France • Tél. : +33 (0)1 34 84 37 43 • E-mail : sales@techniwave.com • www.techniwave.com

TECHNIWAVE Proprietary Information • All rights reserved


Revision : 00

Date : November 09, 2015

Outline drawing

All dimensions in mm

Direction : 1 to 2

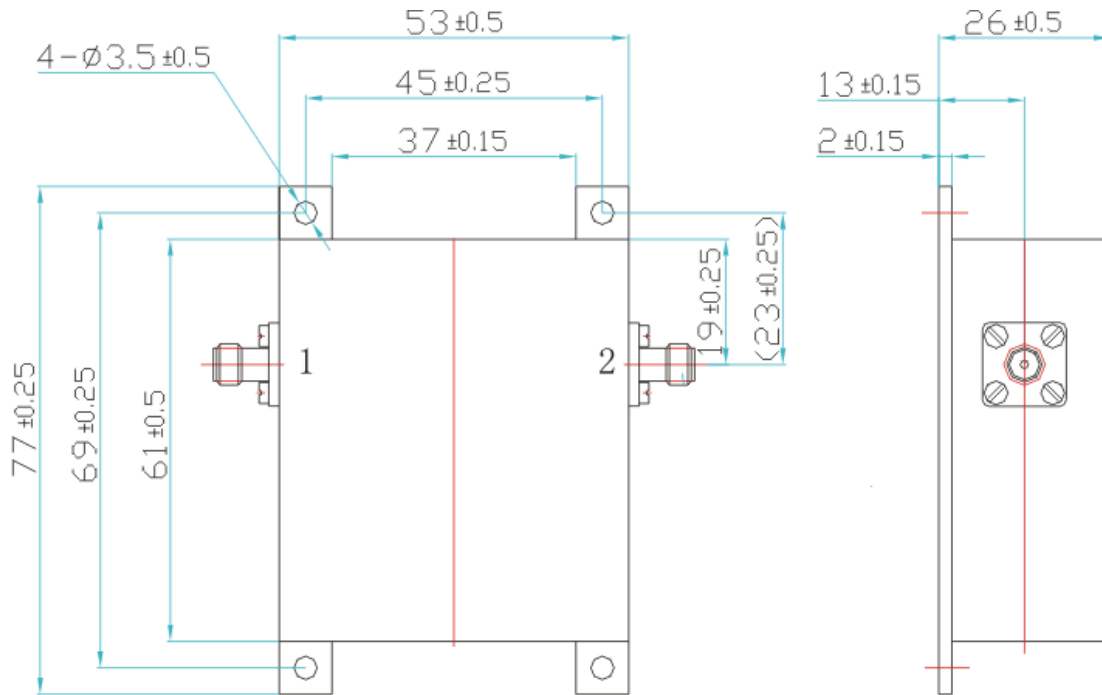

Products and Product Information are Subject to Change Without Notice