

TJXP-A04C0

4-way Power Divider

Typical Applications

- Cellular & Satellite distribution
- PCS, 3G, WLL, Wimax, LMDS
- Fixed Wireless & Microwave Radio
- IF Applications

Main Features

- Wideband 0.8 – 4.2 GHz
- Excellent phase and amplitude unbalance
- SMA Connectorized

Electrical Specifications

Parameter	Unit	Specification
Frequency Range	GHz	0.8 – 4.2
Isolation	dB	18 min
Insertion Loss	dB	< 1.4 (Above 6 dB)
VSWR Input/Output		1.5 : 1 max / 1.4 : 1 max
Phase Unbalance	°	± 5
Amplitude Unbalance	dB	± 0.4
Average Input Power	W	20 max CW
In/Out Impedance	Ohm	50 typ.

Mechanical Specifications

Parameter	Unit	Specification
RF connectors		SMA - female
Finish		Gray Paint

Environment

Parameter	Unit	Specification
Operating Temperature	°C	-40°C to +70°C

Products and Product Information are Subject to Change Without Notice

TECHNIWAVE • Chemin de Montfort 78770 THOIRY France • Tél. : +33 (0)1 34 84 37 43 • E-mail : sales@techniwave.com • www.techniwave.com

TECHNIWAVE Proprietary Information • All rights reserved

Revision : 00


Date : November 09, 2015

TJXP-A04C0

4-way Power Divider

Outline drawing

All dimensions in mm

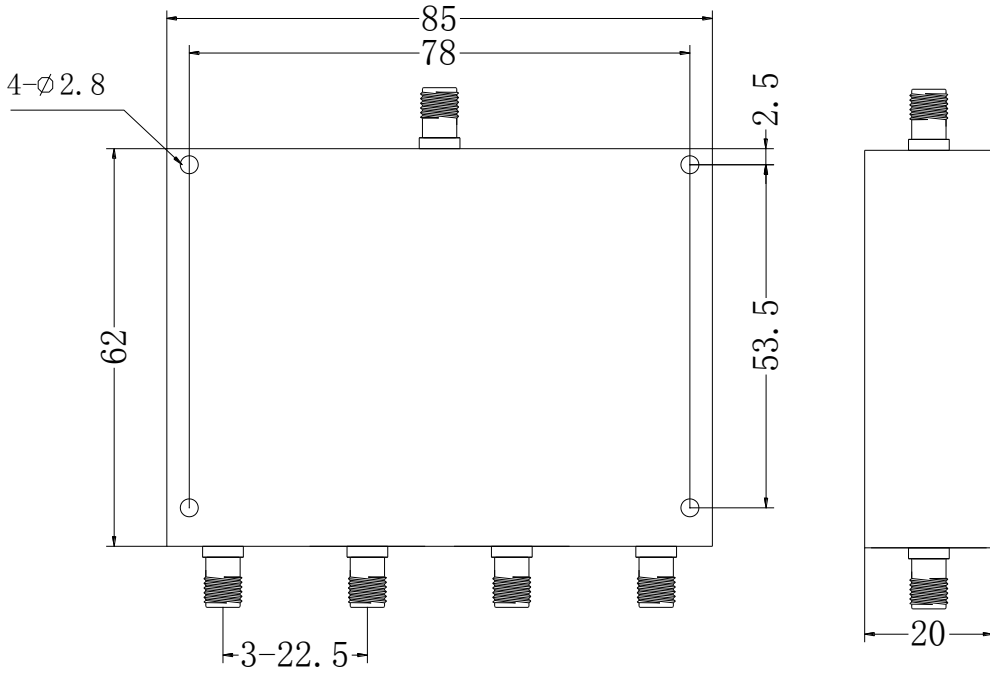

JX8801.5124A0

Products and Product Information are Subject to Change Without Notice