

### Typical Applications

- Duplexer for S-Band System
- Ground Radar applications
- Wireless Telecommunication systems

### Main Features

- High Rejection
- Low insertion Loss
- Excellent Temperature Stability
- Miniaturization
- Rush Delivery
- Customization available upon request

### Electrical Specifications

Parameter	Unit	Specification
Channels		RX
RX Frequency Range	MHz	2500 - 2570
RX Insertion Loss	dB	0.8 typ. 1.2 max
RX Passband Ripple	dB	0.3 typ. 0.5 max
RX VSWR		1.25 : 1 typ. 1.30 : 1 max
RX Rejection	dB	70 min @ TX frequency range 2620 – 2690 MHz
Channels		TX
TX Frequency Range	MHz	2620 - 2690
TX Insertion Loss	dB	0.8 typ. 1.2 max
TX Passband Ripple	dB	0.3 typ. 0.65 max
TX VSWR		1.25 : 1 typ. 1.30 : 1 max
TX Rejection	dB	70 min @ RX frequency range 2500 – 2570 MHz
Average Power Rating	W	30 max
Peak Power Rating	W	300 max
In/Out Impedance	Ohm	50 nominal

Products and Product Information are Subject to Change Without Notice

# TWDU-2G5-2G69A

## Coaxial Cavity Duplexer

### Environment

Parameter	Unit	Specification
Operating Temperature	°C	-30°C to +60°C


### Mechanical Specifications

Parameter	Unit	Specification
RF Connector		SMA - Female
Material		Aluminum
Finish		Gray Paint

### Outline drawing

All dimensions in mm [inches]

Tolerance +/- 0.3 [0.012]

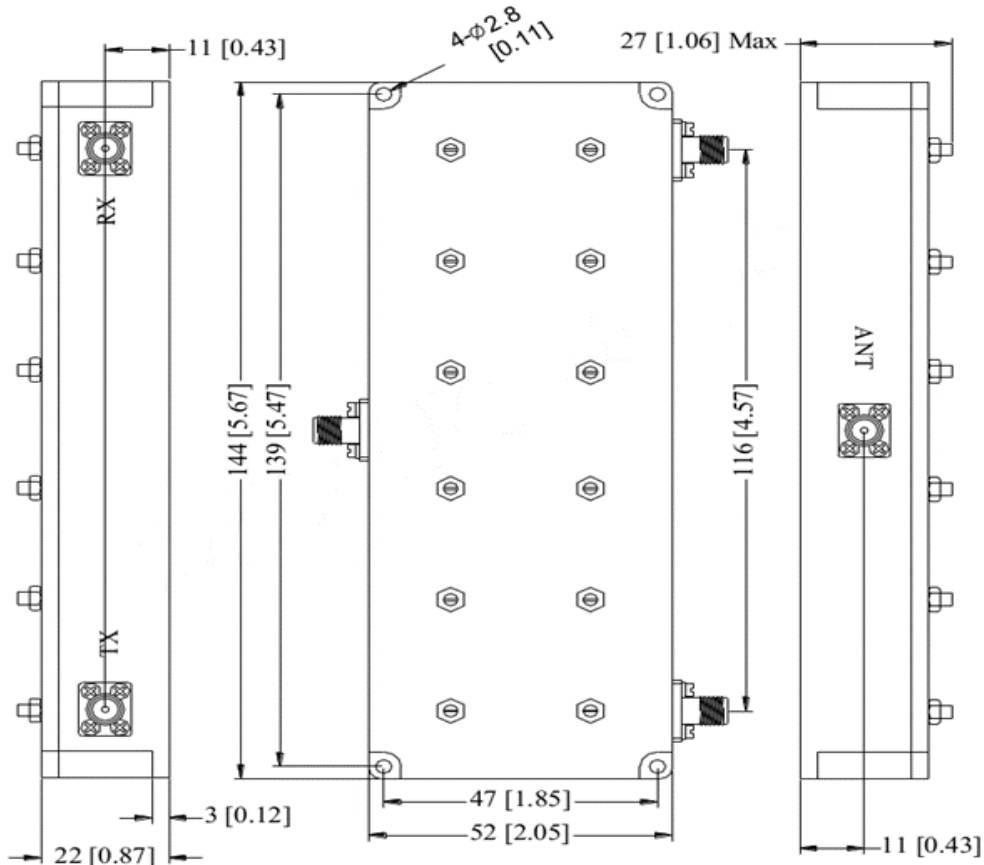

Products and Product Information are Subject to Change Without Notice

TECHNIWAVE • Chemin de Montfort 78770 THOIRY France • Tél. : +33 (0)1 34 84 37 43 • E-mail : sales@techniwave.com • www.techniwave.com

TECHNIWAVE Proprietary Information • All rights reserved

Revision : 00

Date : November 15, 2015