

TWD3I2731-2

RF Coaxial Isolator

Typical Applications

- Microwave Radio & Test Equipment
- SATCOM Applications

Main Features

- Ka-Band Coaxial Isolator
- Low Insertion Loss
- K Connectorized



Electrical Specifications

Parameter	Unit	Specification
Frequency Range	GHz	27 - 31
Isolation	dB	20 min
Insertion Loss	dB	< 0.5
VSWR		1.25 : 1 max
Forward Average Power (1 to 2)	W	5 max CW
Reflective Power (Term.)	W	2 max CW
Peak Power	W	30 max CW
In/Out Impedance	Ohm	50 typ.

Environment

Parameter	Unit	Specification
Operating Temperature	°C	-20°C to +65°C

Products and Product Information are Subject to Change Without Notice

TWD3I2731-2 RF Coaxial Isolator


Mechanical Specifications

Parameter	Unit	Specification
RF connectors		K - Female / K – Male, Passivated Stainless Steel
Contact Pins		Beryllium Copper, Gold Plate

Outline drawing

All dimensions in inches

Tolerance : XX+0.03, XXX+0.01

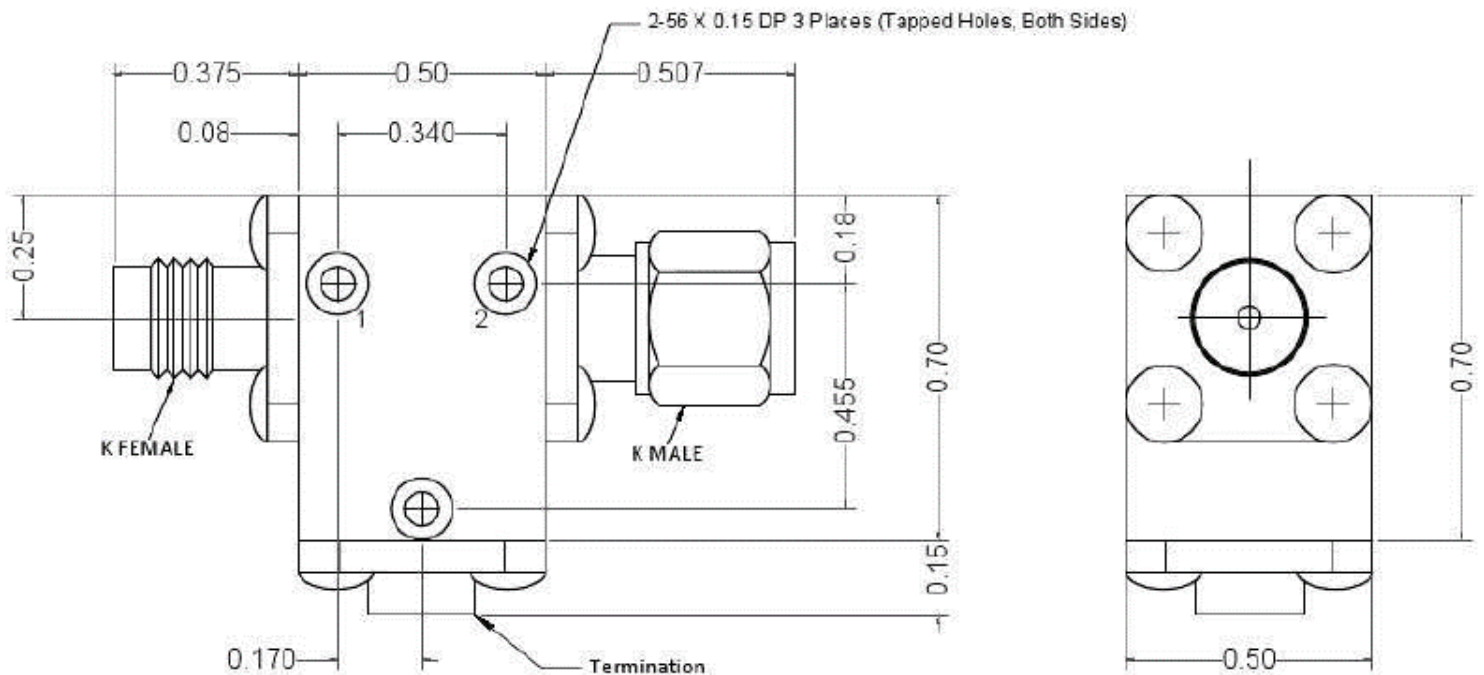

Products and Product Information are Subject to Change Without Notice

TECHNIWAVE • Chemin de Montfort 78770 THOIRY France • Tél. : +33 (0)1 34 84 37 43 • E-mail : sales@techniwave.com • www.techniwave.com
TECHNIWAVE Proprietary Information • All rights reserved

Revision : 00

Date : November 22, 2015