

Typical Applications

- Wireless Telecom systems
- TV Applications
- IF Applications

Main Features

- Wideband UHF-Band Circulator
- Drop-in mounting
- High Power Handling

Electrical Specifications

Parameter	Unit	Specification
Frequency Range	MHz	470 - 710
Isolation	dB	16 min
Insertion Loss	dB	< 1
VSWR		1.4 : 1 max
Average Power Handling	W	20 max CW
In/Out Impedance	Ohm	50 typ.

Environment

Parameter	Unit	Specification
Operating Temperature	°C	-20°C to +70°C


Mechanical Specifications

Parameter	Unit	Specification
RF connectors		tabs
Finish		Nickle plated

Outline drawing

All dimensions in mm

Direction : 1 to 2 to 3

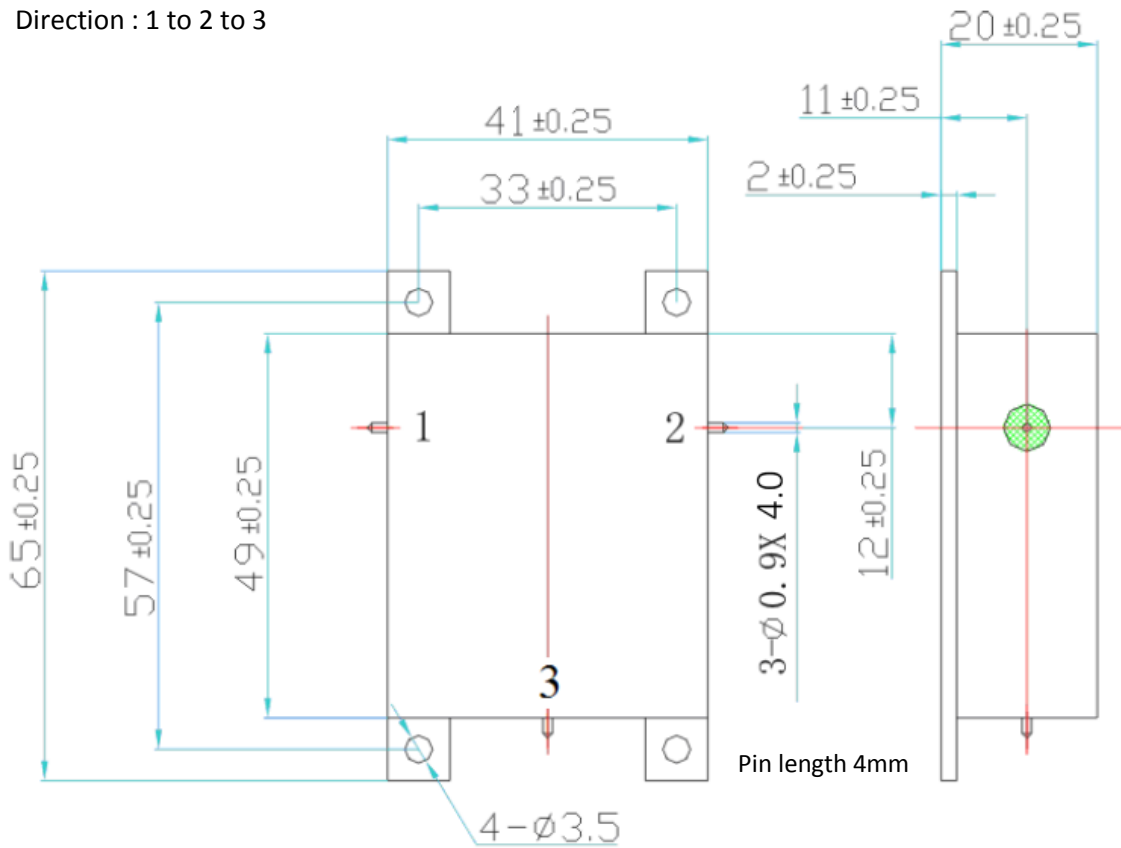

Products and Product Information are Subject to Change Without Notice

TECHNIWAVE • Chemin de Montfort 78770 THOIRY France • Tél. : +33 (0)1 34 84 37 43 • E-mail : sales@techniwave.com • www.techniwave.com

TECHNIWAVE Proprietary Information • All rights reserved

Revision : 01

Date : December 09, 2015